

NX6505 Series - Digital Window Intercom



- Duplex Class D Amplifier
- Touch Activated Backlit Keys
- Metal Structure Eliminates Body Resonance
- Adjustable Gooseneck Microphone
- DSP Multi channel sound technology to avoid squeal
- Three listening modes (quiet / standard / noisy)
- Analog output interface to record conversations

The NX6505 Series Digital Window Intercom system provides support for clear communications when speech is impaired by the use of a glass barrier, security screen, or other counter security barriers.

Applications

Designed for use in any situation involving personal communication with a counterpart at a counter, booth or office, such as:


- Bank Tellers / Money Exchange counters
 - Hospitals, Clinics
 - Ticket Windows
 - Gas Stations
 - Night Service Counters
-

NX6505 Series - Digital Window Intercom

Technical characteristics

Power supply voltage	DC 12V 2A
Operating temperature and humidity	-20°C ~ +60°C, ≤90%RH (no condensation)
AUDIO CHARACTERISTICS	
Speaker	3W Speaker
Audio coding	ADPCM / PCM
Audio sampling	8kHz à 32kHz
DIMENSIONS (MM)	
Agent microphone	160 x 95 x 46.5 – 0.44kg
Speaker-Microphone	102 x 83 x 24 – 0.2kg

Dimensions

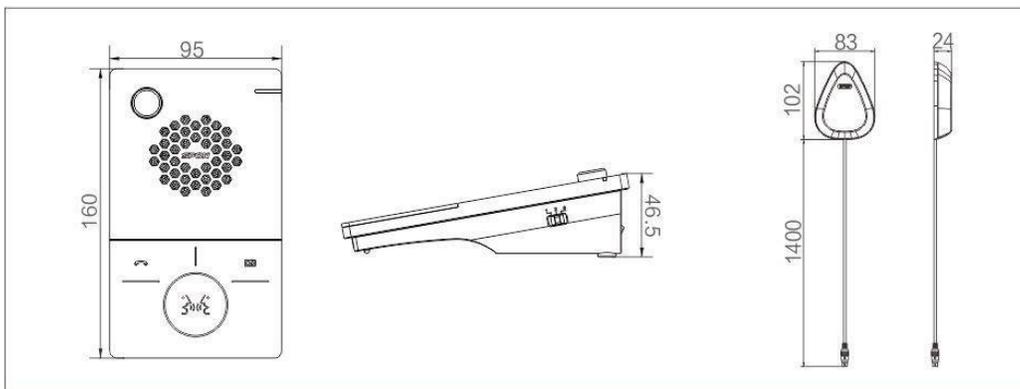

Synoptic of wiring

